



RieberLok-AG™ Gasket for Internal Restraint of AWWA PVC Anger Groove Pipe & Fittings



SUBMITTAL INFORMATION

PROJECT NAME:

ENGINEER:

CONTRACTOR:

SPEC. SECTION:

DATE:

INFORMATION:

- Available in SBR or EPDM
- Stainless steel locking segments
- Available to be pre-installed by the pipe manufacturer or field installed at the jobsite
- Works on all approved Anger Groove Bell pressure pipe & fittings
- Rated at the PVC pipe or pressure fitting rating with a 2:1 safety factor
- Allows the full deflection of the joint, as defined by the pipe or fitting manufacturer
- Suitable for open trench, road bores, and casing applications; please contact RieberLok for HDD applications
- Size range of 6", 8" & 12"
- Suitable for use with all pressure classes of PC305, PC235, PC165
- Assembly instructions, field cut instructions, and FAQs on www.RieberLok.com


RieberLok Gasket Color Codes

For Rieber Gasket Replacement:

| | | |
|---------------|--------------------------|--------|
| 1) CIOD, SBR | <input type="checkbox"/> | White |
| 2) CIOD, EPDM | <input type="checkbox"/> | Orange |
| 3) IPS, SBR | <input type="checkbox"/> | Pink |
| 4) IPS, EPDM | <input type="checkbox"/> | Green |

For Anger Groove Applications:

| | | |
|---------------|--------------------------|--------|
| 5) CIOD, SBR | <input type="checkbox"/> | Red |
| 6) CIOD, EPDM | <input type="checkbox"/> | Yellow |

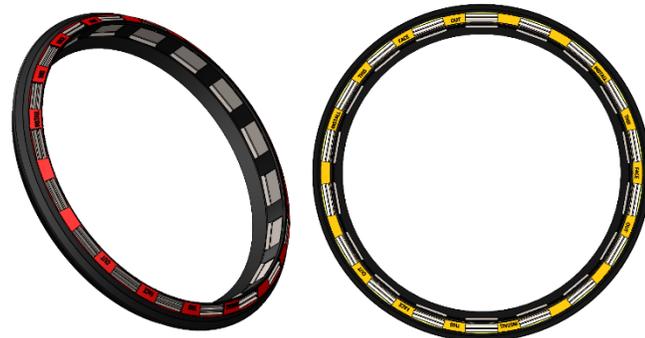

GASKET MATERIAL OPTIONS:

SBR EPDM

